



EXCELLENT QUALITY TRUST WORTHY


Lisha
WhatsApp 联系人



Lisha
浙江 宁波



YUYAO JIALE VENTILATION EQUIPMENT CO.,LTD.
Address:No.7,GongjiRoad,SimenTown,YuyaoCity,
Zhejiang Province,China
Email: info@kale-fan.com
Contact: Lisha
Mob: 13454703020
QQ:313686161



Yuyao Jiale Ventilation Equipment Factory



COMPANY PROFILE

Yuyao Jiale Ventilation Equipment Factory is a professional manufacturer and processing factory of centrifugal, air purifier fan, ventilation fan, dehumidifier fan, ceiling single air inlet fan and other products of central air conditioning terminal. It has a scientific quality management system. Yuyao Jiale Ventilation Equipment Factory's integrity, strength and product quality are recognized by the industry. Welcome friends from all walks of life to visit, guide and negotiate business.

Main products or services: centrifuge at the end of central air conditioning; air purifier fan; fan for ventilation equipment; dehumidifier fan; ceiling single inlet fan; small centrifugal fan; multi-wing centrifugal fan; industrial centrifugal fan; centrifugal fan for air conditioning; centrifugal fan for air purification; small cross-flow fan; cross-flow fan batch; cross-flow fan batch Hair; AC cross flow fan; Industrial low noise centrifugal fan; Low noise cabinet centrifugal fan; Low noise centrifugal fan manufacturer; High efficiency low noise centrifugal fan; Low noise centrifugal fan wholesale; Energy saving low noise centrifugal fan.

CATALOGUE


Production workshop



01

1»AC direct-connected forward centrifugal fan

7-5-110V-60HZ



03

7-5-120W



04

7-5-150W



05

7-7-200W



06

8-7-300W-4



07

8-8-300W-4




08

9-9-450W-4



09

9-9-550W-4



10

10-10-600W-4



11

10-10-750W-4



12

2»DC direct-connected forward centrifugal fan

7-7-200-4




13

SYZ8-8(DC motor)



14

SYZ9-9(DC motor)



15

SYZ10-10(DC motor)



16


3»Impeller accessories



PRODUCTION WORKSHOP



7-5-110V-60HZ

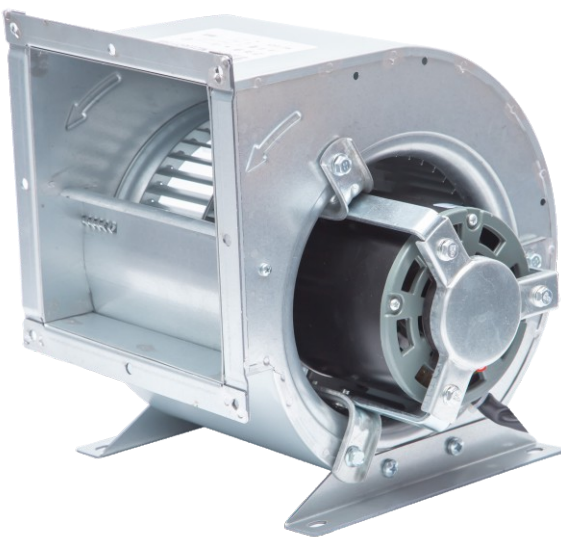

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

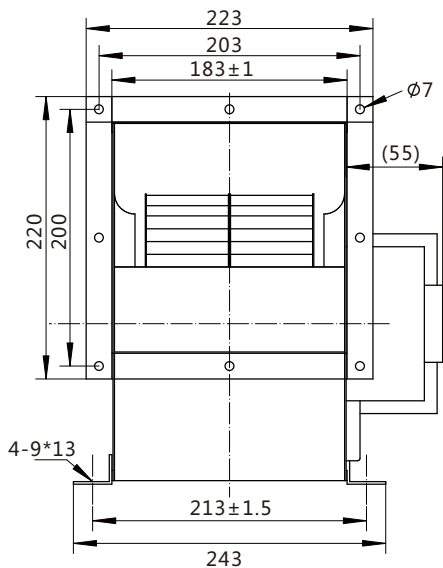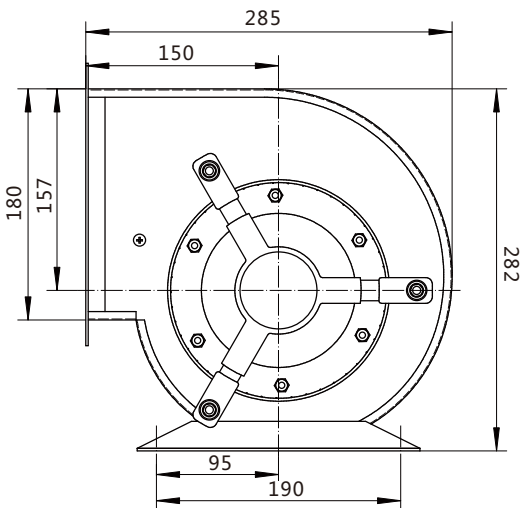

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	376.93	341.13	273.01	243.17	200.87	151.34	107.85	74.34	30.21	5.77
Air volume	m ³ /h	110.86	267.65	632.75	820.42	936.19	1050.90	1070.93	1088.92	1108.39	1117.43
Total pressure of air chamber	Pa	393.62	357.82	289.70	259.85	217.54	168.01	124.52	91.01	46.88	22.43
Electric current	A	1.30	1.40	1.78	2.12	2.41	2.75	2.86	2.94	3.04	3.08
Speed	r/min	1450.00	1450.00	1450.00	1450.00	1450.00	1450.00	1450.00	1450.00	1450.00	1450.00

7-5-120W



Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

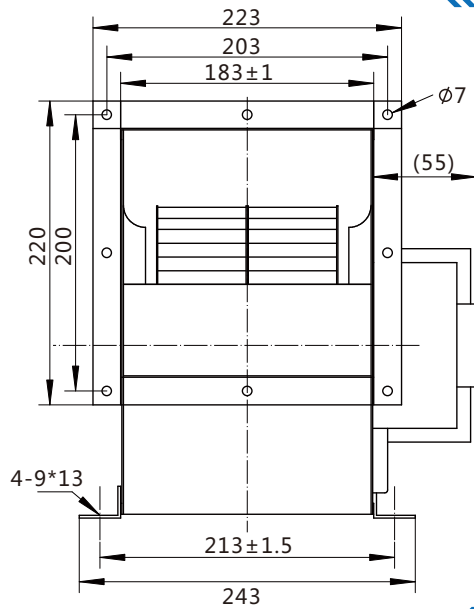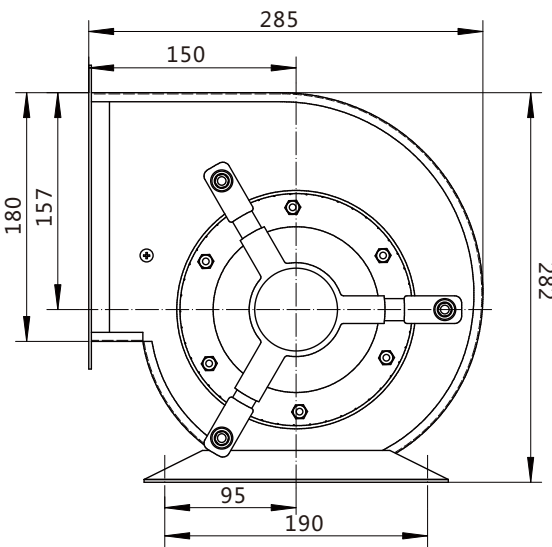

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	283.36	252.69	242.07	252.87	232.18	213.41	185.31	155.64	114.35	39.55
Air volume	m ³ /h	96.12	183.31	277.01	367.60	481.49	575.60	689.86	778.41	876.39	998.57
Total pressure of air chamber	Pa	300.16	269.48	258.86	269.66	248.96	230.19	202.08	172.41	131.11	56.31
Electric current	A	0.59	0.60	0.62	0.65	0.69	0.73	0.78	0.83	0.89	0.99
Speed	r/min	1463.00	1458.00	1453.00	1447.00	1434.00	1425.00	1408.00	1395.00	1380.00	1364.00

8-7-300W-4


Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship


Processing
customization

Professional
production

High quality and
inexpensive

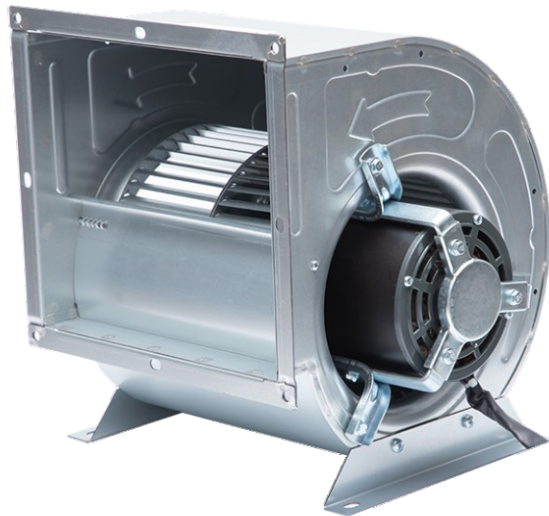

Product size

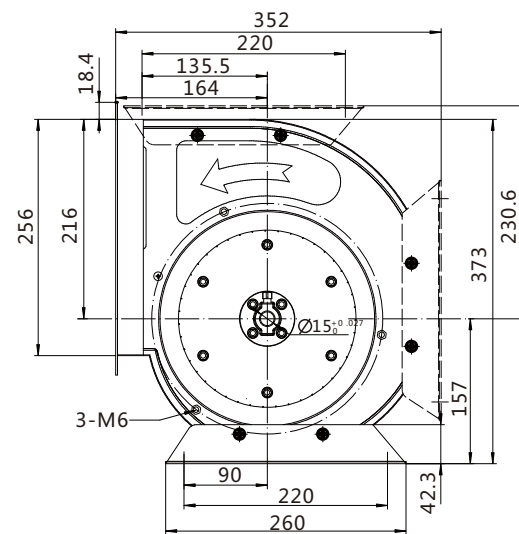

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	504.55	428.84	377.02	344.34	311.47	293.25	260.20	196.11	92.93	0.00
Air volume	m ³ /h	127.53	376.37	610.16	862.99	1343.54	1604.84	1863.27	2149.14	2427.90	2561.59
Total pressure of air chamber	Pa	520.94	445.22	393.40	360.72	327.85	309.63	276.58	212.49	109.30	16.38
Electric current	A	1.35	1.37	1.41	1.51	1.72	1.88	2.08	2.33	2.72	3.15
Speed	r/min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

8-8-300W-4

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship


Processing
customization

Professional
production

High quality and
inexpensive



Product size

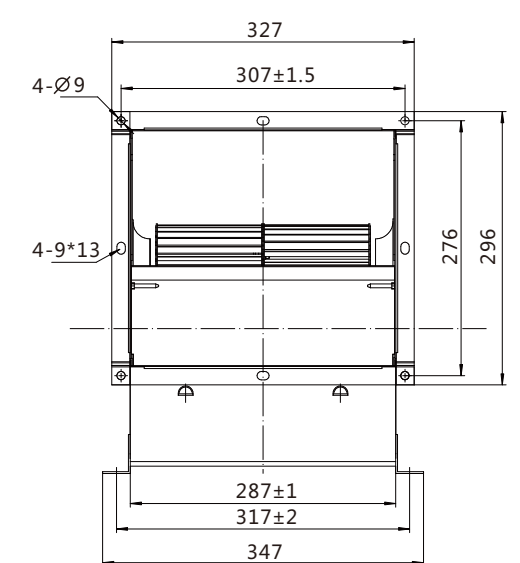

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	518.38	435.89	386.18	347.45	316.96	300.76	248.29	196.93	114.81	5.04
Air volume	m ³ /h	130.47	384.67	626.90	909.09	1376.76	1647.96	1983.91	2191.50	2438.23	2596.33
Total pressure of air chamber	Pa	535.16	452.67	402.95	364.22	333.73	317.52	265.06	213.70	131.57	21.80
Electric current	A	1.37	1.38	1.43	1.54	1.74	1.92	2.19	2.38	2.70	3.07
Speed	r/min	1427.00	1423.00	1416.00	1400.00	1366.00	1335.00	1280.00	1225.00	1135.00	950.00

9-9-450W-4


Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive

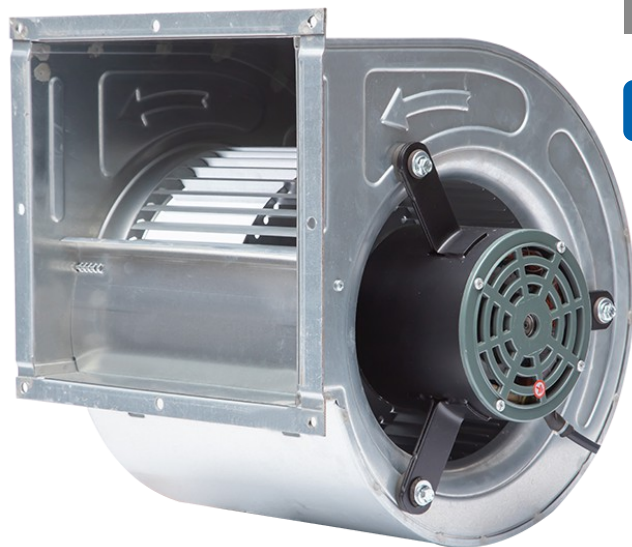

Product size

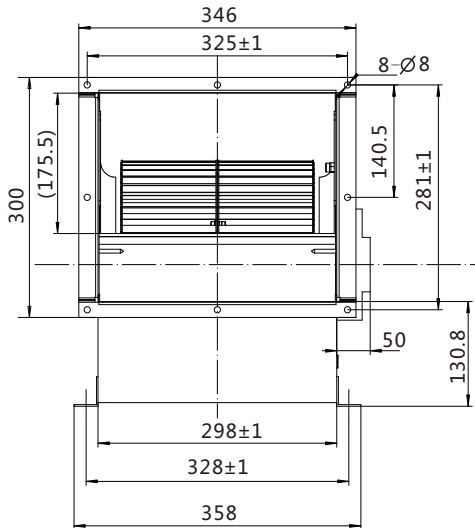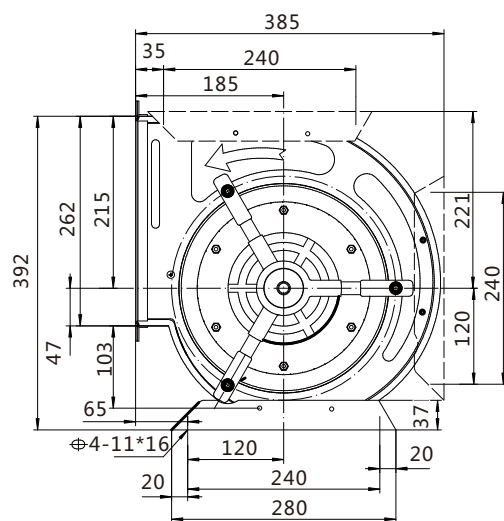

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	549.97	489.45	460.33	434.61	406.23	383.89	373.82	325.02	229.25	0.00
Air volume	m ³ /h	132.62	391.09	744.19	1002.29	1553.05	1845.74	2028.71	2452.86	2883.88	3171.73
Total pressure of air chamber	Pa	566.32	505.81	476.70	450.97	422.59	400.24	390.17	341.37	245.60	16.34
Electric current	A	2.02	2.05	2.17	2.29	2.56	2.77	2.91	3.38	4.10	5.67
Speed	r/min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

9-9-550W-4


Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive

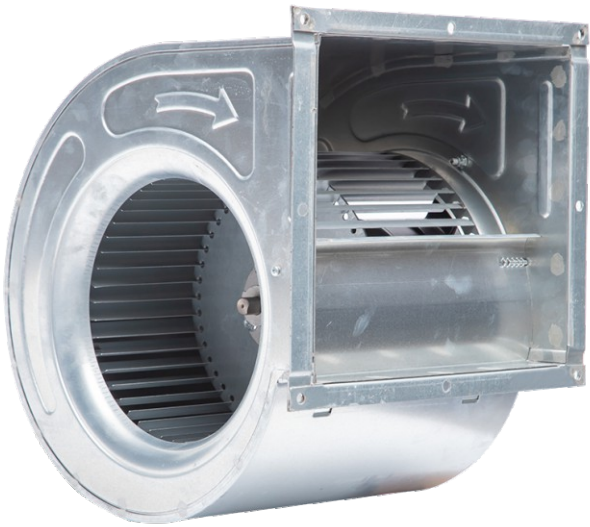

Product size

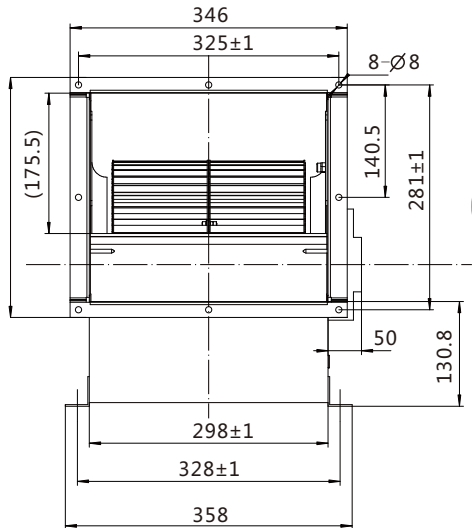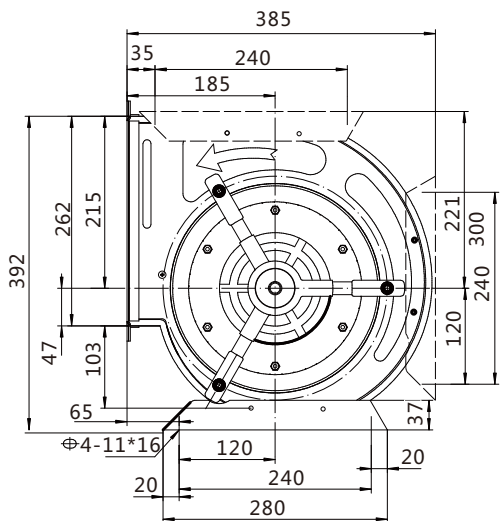


Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	573.04	511.06	481.03	445.14	410.99	382.42	375.37	338.48	267.43	0.00
Air volume	m ³ /h	136.04	398.07	709.70	1010.00	1553.89	1837.01	2033.01	2484.43	2865.29	3567.71
Total pressure of air chamber	Pa	589.42	527.44	497.40	461.51	427.36	398.79	391.74	354.85	283.79	16.36
Electric current	A	1.88	1.92	2.05	2.21	2.51	2.72	2.86	3.33	3.88	5.89
Speed	r/min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

10-10-600W-4

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

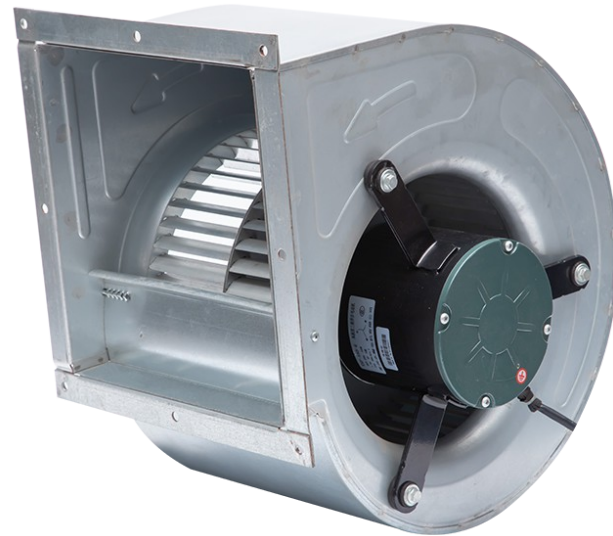

Excellent
workmanship


Processing
customization

Professional
production

High quality and
inexpensive



Product size

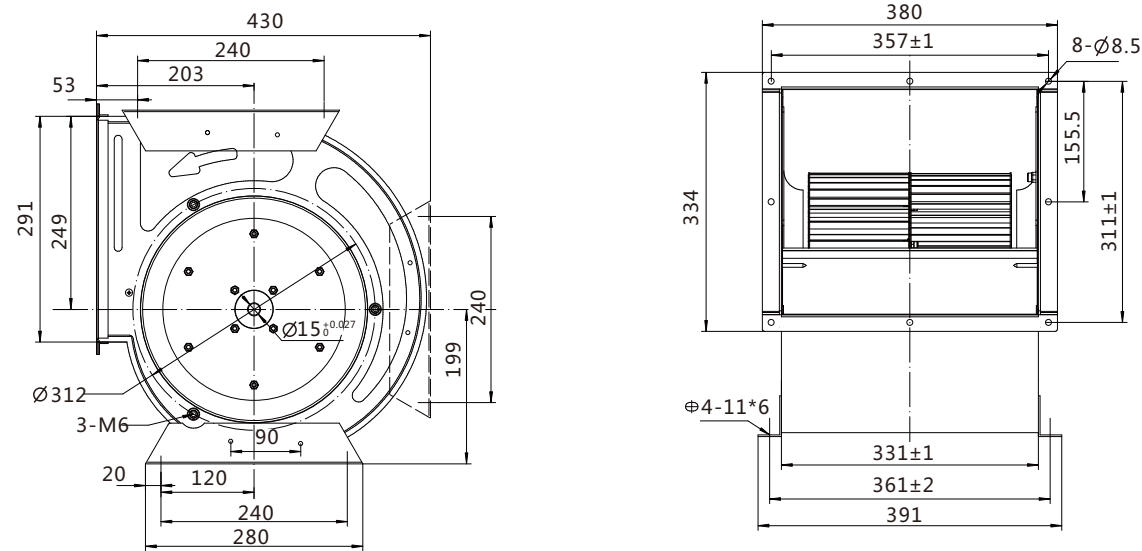


Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	692.24	607.10	568.83	501.81	480.29	475.72	421.33	394.69	307.53	36.62
Air volume	m³/h	150.98	565.35	888.77	1735.84	2172.06	2638.38	3066.62	3548.40	3831.79	4003.99
Total pressure of air chamber	Pa	709.07	623.90	585.61	518.57	497.04	492.46	438.08	411.41	324.24	53.33
Electric current	A	2.81	2.84	2.91	3.49	3.81	4.32	4.81	5.35	5.88	7.15
Speed	r/min	1440.00	1435.00	1428.00	1391.00	1360.00	1331.00	1289.00	1214.00	1090.00	680.00

10-10-750W-4

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

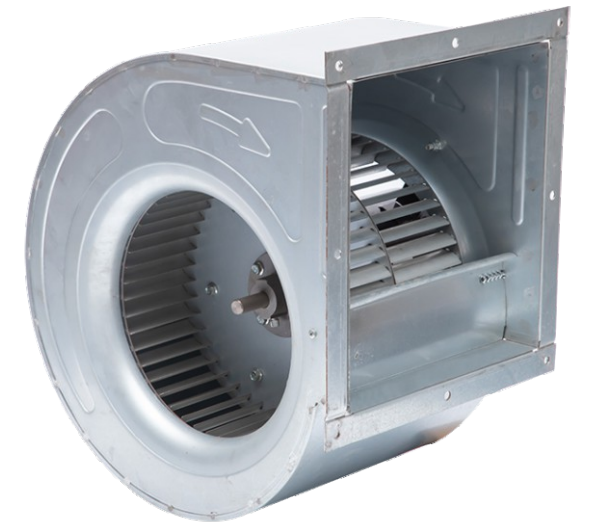

Excellent
workmanship


Processing
customization

Professional
production

High quality and
inexpensive




Product size

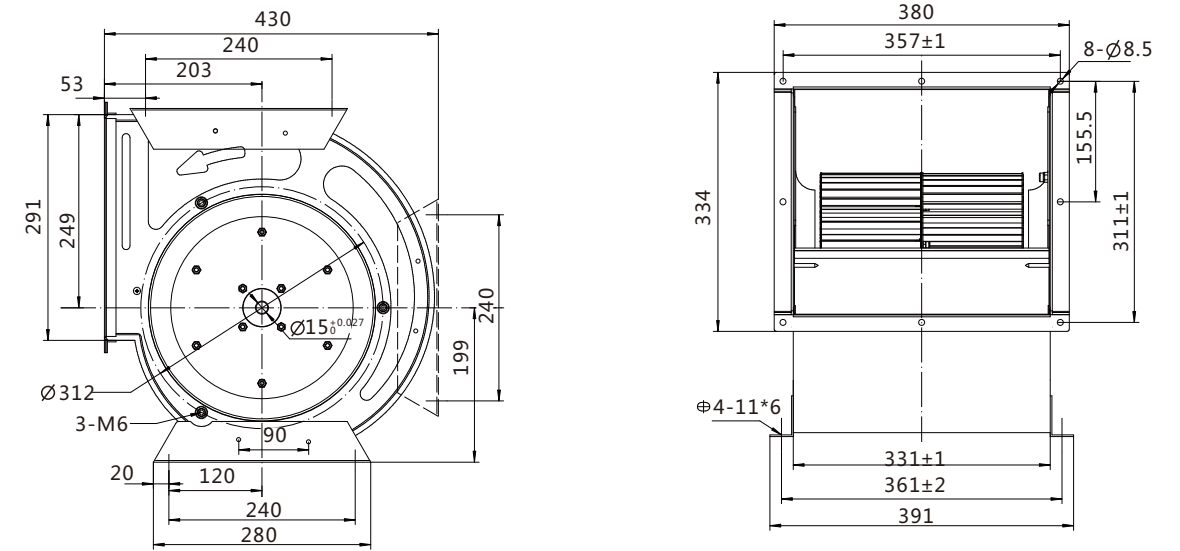

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	703.41	623.12	577.34	523.60	491.19	484.96	422.34	396.34	334.54	248.02
Air volume	m³/h	153.20	576.23	896.56	1770.08	2023.05	2722.08	3578.12	4168.53	4579.92	4988.38
Total pressure of air chamber	Pa	720.29	639.97	594.19	540.43	508.01	501.77	439.13	413.12	351.31	264.78
Electric current	A	1.26	1.29	1.31	1.49	1.54	1.78	2.08	2.33	2.57	2.88
Speed	r/min	1440.00	1437.00	1431.00	1398.00	1386.00	1343.00	1299.00	1234.00	1180.00	1116.00

SYZ7-5-200

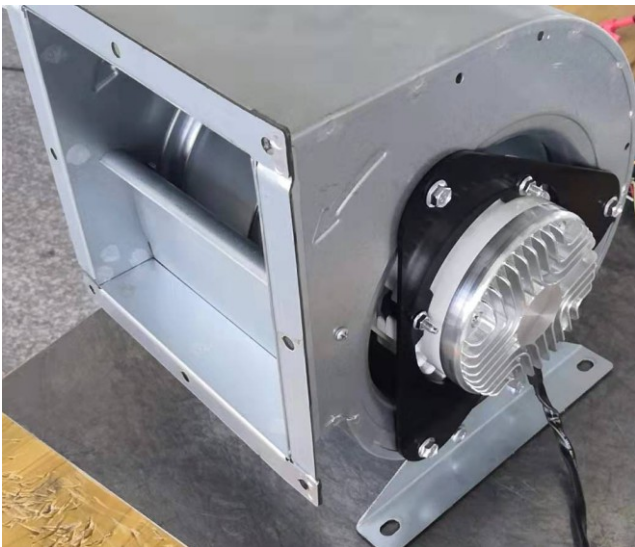

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

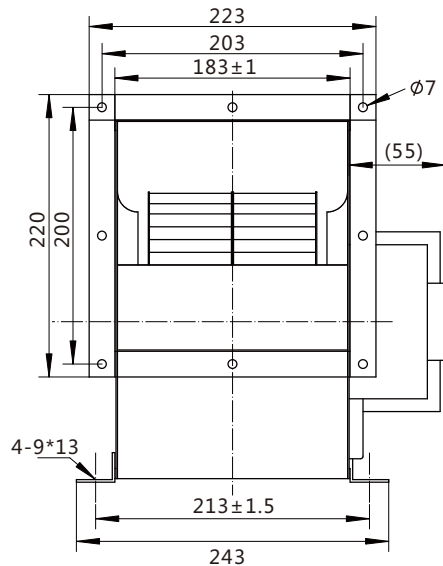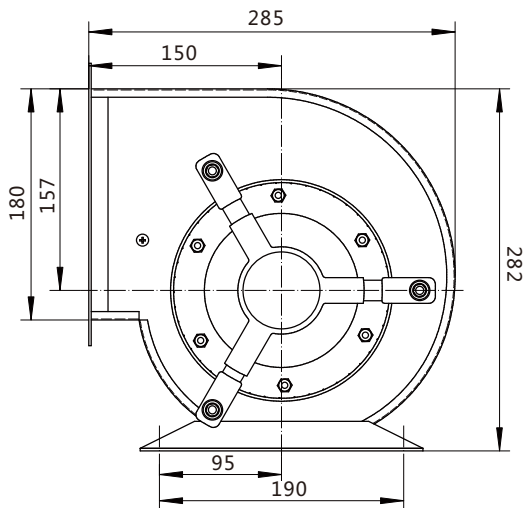

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	6.32	49.62	85.05	115.45	147.59	173.95	239.32	271.92	308.17	336.37
Air volume	m³/h	2084.52	1992.20	1901.78	1811.53	1682.60	1583.04	918.55	532.16	277.30	112.95
Total pressure of air chamber	Pa	23.99	67.30	102.73	133.13	165.26	191.63	257.00	289.59	325.84	354.04
Electric current	A	1.99	1.88	1.79	1.72	1.62	1.58	1.37	1.32	1.31	1.30
Speed	r/min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

SYZ8-8(DC motor)



Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

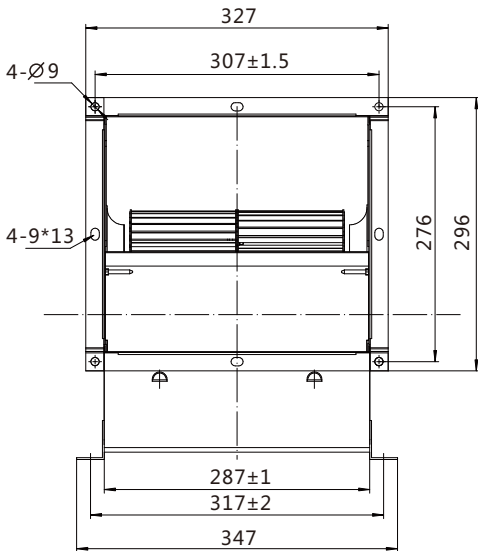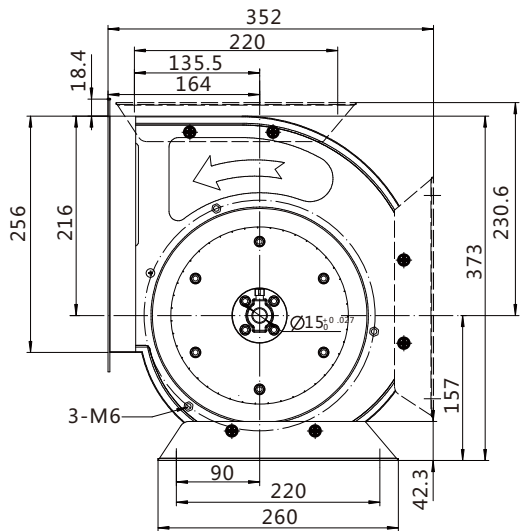

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	436.44	428.02	376.65	327.67	293.06	252.05	212.68	164.07	115.54	68.67
Air volume	m³/h	366.46	400.00	880.86	2009.79	2423.16	2638.58	2813.06	2903.13	3000.11	3126.60
Total pressure of air chamber	Pa	436.65	428.27	377.88	334.06	302.34	263.05	225.18	177.38	129.76	84.11
Electric current	A	1.95	1.96	2.45	4.23	5.15	5.41	5.58	5.52	5.52	5.61
Speed	r/min	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00

SYZ9-9(DC motor)



Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

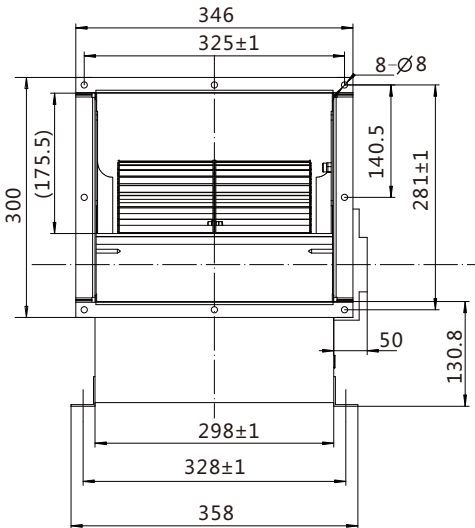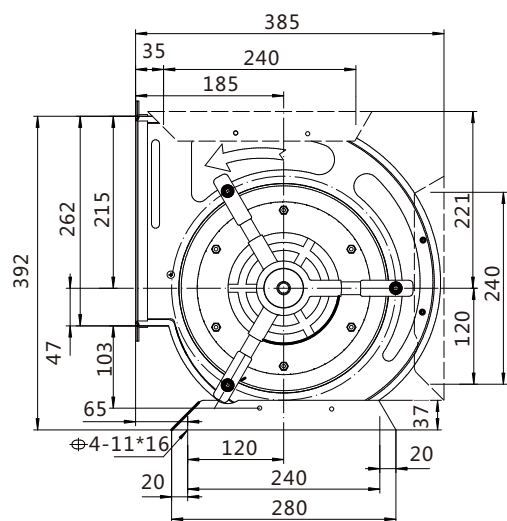

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	475.99	421.70	399.36	360.54	313.39	284.92	259.28	228.89	203.89	166.08
Air volume	m ³ /h	825.33	2120.97	2661.35	2943.32	3102.63	3218.28	3430.57	3541.66	3585.39	3711.25
Total pressure of air chamber	Pa	495.63	551.36	603.43	610.08	590.65	583.21	598.19	590.08	574.00	562.66
Electric current	A	2.78	5.40	5.95	6.17	6.17	6.26	6.30	6.32	6.42	6.44
Speed	r/min	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

SYZ10-10(DC motor)



Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship



Processing
customization

Professional
production

High quality and
inexpensive



Product size

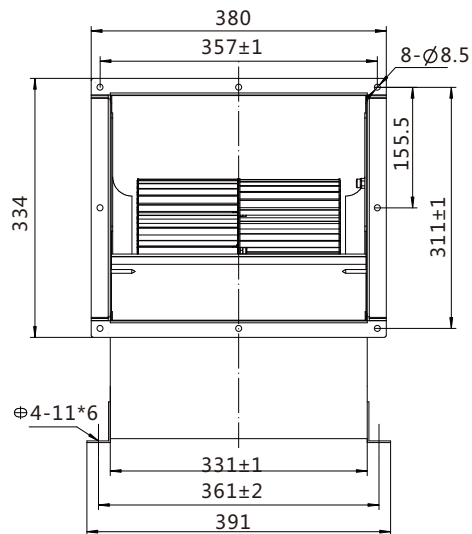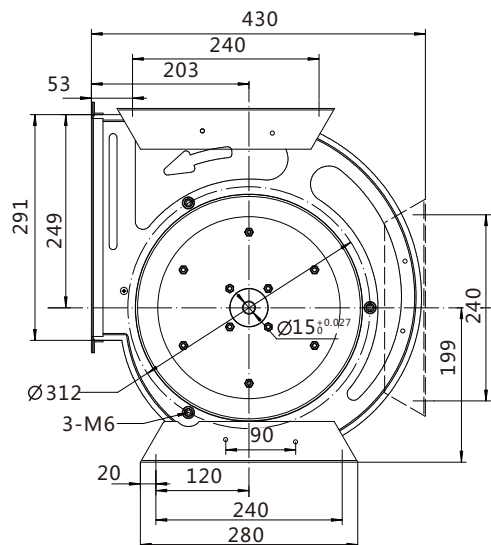

Test record

Working condition serial number	Unit	1	2	3	4	5	6	7	8	9	10
Static pressure of air chamber	Pa	431.95	397.62	372.63	349.83	324.19	293.89	260.93	224.49	203.16	0.00
Air volume	m ³ /h	3644.26	3820.94	6967.80	4210.30	4401.01	4572.78	4753.00	4930.10	5011.96	0.00
Total pressure of air chamber	Pa	449.47	415.10	390.10	367.29	341.65	311.34	278.37	241.93	220.59	0.00
Electric current	A	6.59	6.28	6.37	6.58	6.51	6.55	6.66	6.63	6.62	0.00
Speed	r/min	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	1400.00	0.00

Other products and accessories


Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship

Processing
customization

Professional
production

High quality and
inexpensive

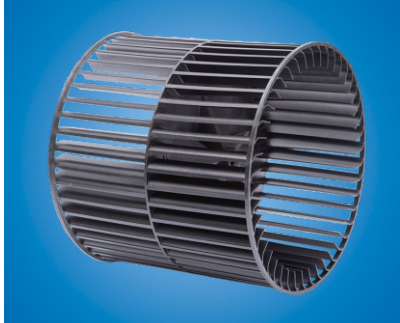

Other products and accessories






Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship

Processing
customization

Professional
production

High quality and
inexpensive

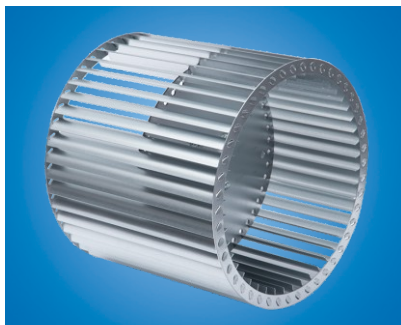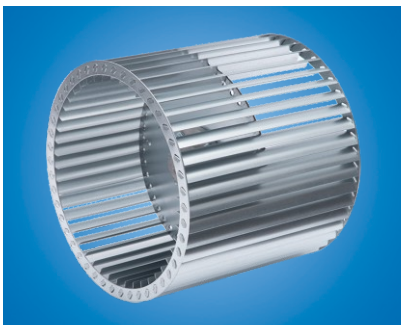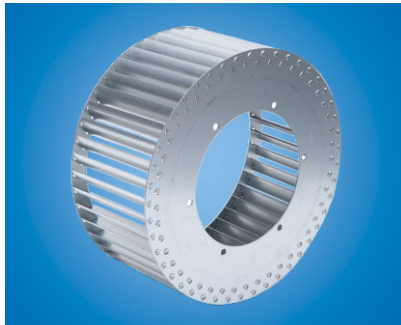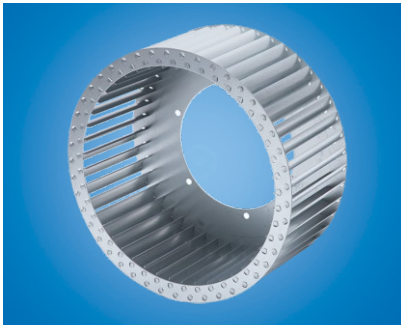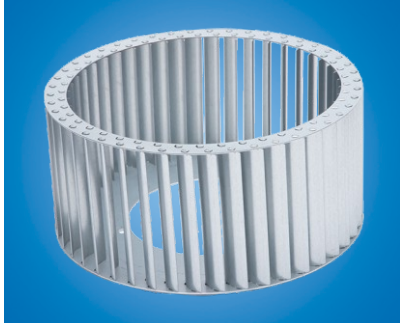

Other products and accessories



Strong overload and anti-interfere-
nce ability can adapt to complex
environment

Excellent
workmanship

Processing
customization

Professional
production

High quality and
inexpensive

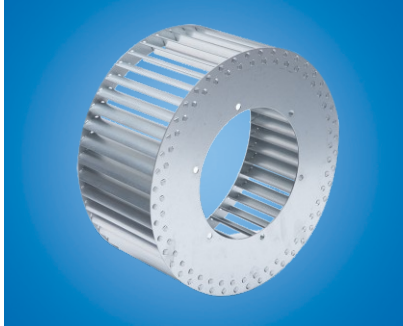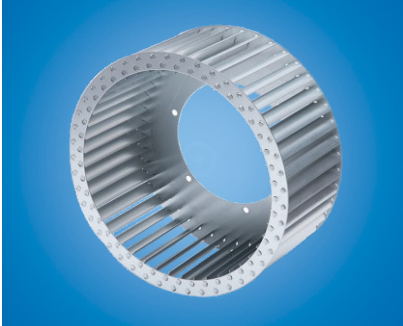

Other products and accessories

Excellent
workmanship

Processing
customization

Professional
production

High quality and
inexpensive

Strong overload and anti-interfere-
nce ability can adapt to complex
environment

